




PCT/2003 / 0 0 5 5 6 4



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

BEST AVAILABLE COPY

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

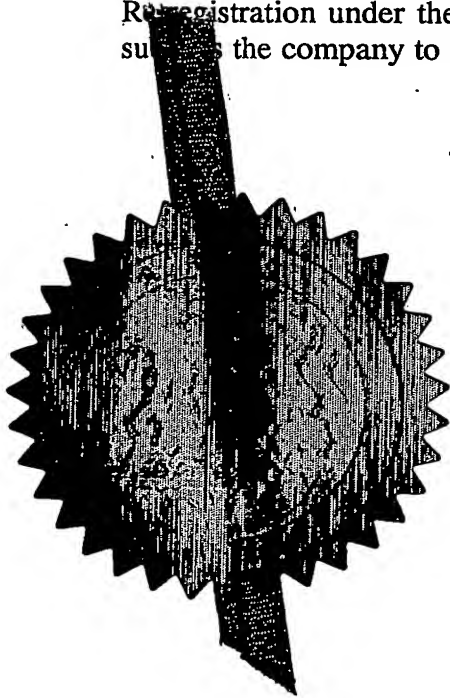

Signed

Dated

22 December 2003

Patents Form 1/77

Patents Act 1977
(Rule 16)THE PATENT OFFICE
A

23 DEC 2002

RECEIVED BY FAX

The
**Patent
Office**23DEC02 E772795-1 002806
P01/7700 0.00-0229772.9**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet, from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

JL3517

2. Patent application number

(The Patent Office will fill in this part)

0229772.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)THE UNIVERSITY OF NOTTINGHAM
UNIVERSITY PARK
NOTTINGHAM
NG7 2RD

Patents ADP number (if you know it)

4376927002

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

OPTICALLY TRIGGERED INTERACTIVE APPARATUS
AND METHOD OF TRIGGERING SAID APPARATUS

5. Name of your agent (if you have one)

Barker Brettell

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

138 Hagley Road
Edgbaston
Birmingham
B16 9PW

Patents ADP number (if you know it)

7442494002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of Filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document
- Continuation sheets of this form -

Description 22 + 22

CF

Claim(s) 6 + 6

Abstract 01 + 01

Drawing(s) 4 + 4 4 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination 1
(Patents Form 9/77)Request for substantive examination
(Patents Form 10/77)Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature
Barker Brettell

Date

23 DECEMBER 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

John Lawrence

Tel: 0121 456 1364

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

1

OPTICALLY TRIGGERED INTERACTIVE APPARATUS AND METHOD OF TRIGGERING SAID APPARATUS

5 This invention relates to an optically triggered interactive apparatus and a method of triggering said apparatus. More particularly, but not exclusively, the invention relates to an interactive apparatus that is triggered by a broad band, broad beam, directional light source and a method of triggering said apparatus.

10

The use of light source, for example laser pointers, to trigger sensors mounted within a scene is known. The sensors are typically used to control the output of an audio and/or visual data file. Such systems are found in museums, and tourist attractions, where an audio file is triggered
15 and downloaded onto a handheld device in order to inform a user about their environment, or about an exhibit (the sensor being mounted near the exhibit).

Laser pointers have a problem associated with them in that due to their
20 highly collimated nature a slight angular deflection at a laser source results in a deviation of the whole beam such that the beam falls off the sensor. The data file can stop "playback" to a user when the beam falls off the sensor, only to be restarted when the beam resides on the sensor again. This leads to a jittery, disjointed audio-visual experience for a user
25 of the system. Alternatively, the laser beam can be used merely to trigger a data file that runs to completion when triggered accidentally or a user has experienced the audio-visual file already. Also if a succession of visitors arrive at an exhibit later visitors can arrive part way through the playback of the data file, after the person who triggered the data file's
30 playback has moved away. It can then be irritating for the later visitors to

wait for the data file to play all the way through before they can restart the data file.

5 Additionally, due to the coherent nature of laser light, it is not readily possible to distinguish between laser sources using sensors used to trigger audio-visual displays. This makes identifying a user and tracking their progress around an exhibit or building very difficult.

10 Another concern with the use of a laser source is the potential damage to eyes caused by accidental exposure to the direct laser beam. The use of laser beams may damage delicate artefacts due to the high intensity of the emitted radiation.

15 Infra-red activated systems are also known, in which infrared beamers (like a TV remote control) are used to point at infrared tags that are positioned on a display, several such systems exist that are targeted at museums and galleries. The problems with these are that the infra-red radiation is invisible so that a user of the system cannot see what is being pointed at, sensors have to be attached to the surface, limited scale and range, and
20 limited resolution. It is hard to select from many targets that are close together on the surface.

The mounting of sensors within a scene can itself be problematic as sensors must be fixed to a point within a scene over which a user/visitor
25 can point their laser. For example, the fixing of a sensor to a historic tapestry or work of art would present special problems. Mounting sensors high up, or in awkward to access areas for infra-red activated systems has its own attendant problems.

30 Also, should a different area of a scene be selected as a trigger area for an infra-red activated system from the one currently used, for example if

a museum's management decide to change an exhibit, it is necessary to demount a sensor, or disconnect it, and mount, or connect a new sensor in the newly selected trigger area. This can involve substantial amounts of work and labour to effect such a physical location of the sensor in the target area. This provides an inertia against changing things too often.

It is an aim of the present invention to, at least partially, ameliorate at least one of the above-mentioned problems and/or difficulties.

10 According to a first aspect of the present invention there is provided an optically triggered interactive apparatus, comprising scene capture means arranged to capture an image of a scene, target selection means arranged to select a target area within a reference image of a scene, detection means arranged to detect the presence of light incident within the target area of an active video image captured by the scene capture means, the
15 detection means is arranged to determine an outer extent of an illuminated area, illuminated by a light source, within the scene, and the detection means being arranged to output a trigger signal to processing means when a given proportion of the target area forms part of the illuminated area
20 and/or when a given proportion of the illuminated area lies within the target area.

The use of a video images of a scene with target areas selected within the scene obviates the necessity to attach sensors to the target areas of the scene. Additionally, a light beam can easily be seen by the user and
25 others nearby who may be interacting with the apparatus at a distance. This arrangement also supports collaborative triggering. Also, a torch beam actually illuminates the scene so that the user can see it better - useful in naturally dark environments or where light levels need to be
30 kept low, for example to protect valuable artefacts that might degrade over time.

It will be appreciated that the term optical as used herein encompasses not only visible radiation but also infra-red and ultra-violet radiation.

- 5 The light source may be any one, or more, of the following: broad band, directional, spatially extensive.

The scene capture means may comprise a video camera, a CCD device, or the like.

10

The illuminated area may be variable in size or it may be fixed in size, typical sizes of the illuminated area range from 1cm^2 to 75cm^2 . The illuminated area may be as large as 1m^2 , and possibly as much as, or larger than, 10m^2 . The use of a beam of a sizeable, finite size reduces and ideally
15 removes the effects of wobble and re-triggering, when a beam falls off a target area and back on to it, as a proportion of the beam can usually be maintained on the target area. The target area may range from 4cm^2 to 400cm^2 , with a typical target area being approximately 100cm^2 but could be as large, or larger than, as $1-10\text{m}^2$.

20

The target selection means may comprise a graphical user interface (GUI) which may be running on a computer such as, for example, a personal computer (PC). The use of a GUI allows the simple and rapid alteration, for example repositioning, resizing and/or reshaping, of target areas
25 within a captured image without having to physically move sensors.

The detection means may comprise a signal processor. The detection means may be arranged to compare the reference image with the active image in order to detect the presence of light incident with the target
30 area. The detection means may be arranged to track movement of at least one beam of light incident upon the scene. The detection means may be

arranged to monitor either one, or both, of an intensity profile or, and, a chromatic profile of a light source, incident upon the scene. The detection means may be arranged to track a given light source, incident upon the scene based upon either, or both, of the intensity profile or, and, the
5 chromatic profile of the light source incident upon the scene.

The detection means may be arranged to determine a centroid, or other spatial or radiometric features, of an illuminated area within the scene and may be arranged to output the signal when the feature is within a
10 target area.

The detection means may be arranged to determine an outer extent of an illuminated area within the scene and may be arranged to output the signal when a given proportion of the target area forms part of the illuminated
15 area and/or when a given proportion of the illuminated area lies within the target area. The outer extent of the illuminated area may be determined by a threshold intensity, or a threshold contrast between adjacent regions of the illuminated area.

20 The light source may be a torch. Torches have non-uniform, highly individual, intensity profiles that act as fingerprints and allow them to be identified and possibly tracked individually upon demerging of two or more merged torch beams. The light source may be focusable. The light source may be arranged to be modulated, typically in a manner that is not
25 visible, or not readily visible, to the human eye. The detection means may be arranged to increment a counter, or any other time based measurement, each time a given light source, or light source from a group of predetermined light sources, or any light source, illuminates a given target area. The detection means may be arranged to output a trigger
30 signal that is dependent upon the value of the counter. The actuation means may be arranged to output an audio, a visual or an audio-visual

rich media file that is dependent upon the trigger signal output by the detection means. This allows a different output each time to be played to a user upon different occasions of the same light source illuminates a target area, or another particular pattern of activity, for example, when
5 specific gestures are detected.

The scene capture means may include the detection means. The trigger signal may be transmitted wirelessly over a local area network (WLAN) to the actuation means. The actuation means may be arranged to output an
10 audio, a visual or an audio-visual rich media file upon receiving the trigger signal.

The apparatus may comprise a plurality of image capture means, each of which may be arranged to capture an active image of the scene, viewing
15 the scene from different viewpoints and/or angles. The detection means may be arranged to receive inputs from each of image capture means and may be arranged to output a trigger signal to the actuation means if one or more target areas is illuminated in at least one of the active images.

20 This arrangement with multiple video cameras, image capture means, reduces the chance that an active target area will be obscured from view of the scene capture means by a user or third party.

It will be appreciated that the scene may be a virtual scene, for example a
25 data construct, which may be projected on to a surface. The reference image may be a map of the virtual scene. Thus, it is not necessary for the scene to be a physical scene it may be a computer generated scene or a scene stored on a data storage device which may, or may not, be projected on to a surface. The reference scene may be an empty co-
30 ordinate framework data structure upon which the location of a target area is registered.

According to a second aspect of the present invention there is provided a method of optically triggering an interactive apparatus comprising the steps of:

- 5 i) defining at least one target area within a reference image of a scene;
- ii) illuminating a portion of the scene with a light source;
- iii) capturing an active image of the scene;
- 10 iv) determining a boundary of an area of illumination of the light source;
- v) determining whether a predetermined fraction of the area of illumination illuminates at least part of a target area; and
- 15 vi) outputting a trigger signal if the light source illuminates at least a part of the target area on a predetermined manner.

The method may include providing the light source as any one, or more, of the following: broad band, directional, spatially extensive.

20 The method may include determining whether a centroid of an area of illumination of the light source is disposed within at least part of a target area. The method may include determining a boundary of an area of illumination of the light source and may further include determining whether a predetermined fraction of the area of illumination illuminates at least part of a target area.

25 The method may include selecting, or defining, the target area, or areas by means of a graphical user interfaces.

30 The method may include comparing the reference image with the active image in order to determine if a target area is at least partly illuminated. The method may include identifying a light source illuminating an area of

the scene, for example by means of either an intensity profile or a chromatic profile. The method may include tracking the movement an area of illumination within the scene.

- 5 The method may include tracking the movement of a plurality of light sources illuminating areas of the scene.

The method may include incrementing a counter each time a trigger signal is generated by a selected given light source illuminating at least part of a
10 target area, or when one of a selected group of light sources do so, or when any light source does so. The method may include outputting a differing trigger signal dependent upon the value of the counter.

The method may include outputting an audio, a visual or an audio-visual
15 rich media file in response to a processor receiving the trigger signal.

The method may include outputting the trigger signal via a wireless local area network (WLAN) to the processor.

- 20 The method may include capturing a plurality of active images of the scene from a number of image capture means spaced thereabout.

According to a third aspect of the present invention there is provided a user interface located at a user device for use in selecting a target area
25 and a corresponding output file for an optically activated interactive apparatus comprising:

an input mechanism for selecting an area of an image displayed upon a screen of the device as a target area;
an input mechanism for selecting the output file corresponding to the
30 selected target area and/or another aspect of the image, the target area and output file having a link generated therebetween; and

an output mechanism arranged to output the output file upon a trigger condition being fulfilled.

The trigger condition may be an image capture means capturing an image
5 of the target area being at least partially illuminated by a broad beam light source

According to a fourth aspect of the present invention there is provided a method of determining user demographic statistics comprising the steps
10 of:

- i) providing each user with an identifiable light source;
- ii) recording demographic information about each user;
- iii) providing an optically triggered interactive apparatus in accordance with the first aspect of the present invention;
- 15 iv) recording each time a target area is triggered by a user; and
- v) identifying each user by correlating their identifiable light source with their demographic information.

The method may include recording how long each target area is
20 illuminated by a users light source. The method may include storing the demographic data and the recorded data for a period of days, weeks, or months.

According to a fifth aspect of the present invention there is provided a
25 method of defining a target area, for use with an apparatus in accordance with the first aspect of the present invention, within a scene comprising:

- i) displaying a reference image upon a screen;
- ii) selecting an area of a screen as a target area; and
- iii) confirming the selection of the target area.

30

10

The method may include using a user manipulated device such as a keyboard, mouse, trackball or touchscreen to select the target area from the screen.

- 5 According to a sixth aspect of the present invention there is provided a method of providing exhibit commentary comprising the second aspect of the present invention, further comprising outputting an audio commentary in response to the outputting of the trigger signal.
- 10 According to a seventh aspect of the present invention there is provided a method of providing an educational aid comprising the second aspect of the present invention.

- 15 According to a eighth aspect of the present invention there is provided a method of providing an educational aid comprising the second aspect of the present invention.

- 20 According to a ninth aspect of the present invention there is provided a computer readable medium having stored therein instructions for causing a processing unit to execute the method of any one of the second, fourth, fifth, sixth, seventh or eighth aspects of the present invention.

- 25 According to a tenth aspect of the present invention there is provided a computer readable medium encoding a programme of instructions which when run upon a processor cause the processor to act as the detection means of the first aspect of the present invention.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

30

11

Figure 1 is a schematic diagram of an optically controlled interactive apparatus according to at least one embodiment of the present invention;

5 Figure 1a is a schematic diagram of an optically controlled interactive apparatus according to at least one other embodiment of the present invention;

10 Figure 2 is a representation of a target selection GUI of the apparatus of Figures 1 and 1a;

Figure 3 is a schematic representation of a centroid based beam location scheme;

15 Figure 4 is a schematic representation of an overlap based beam location scheme;

20 Figure 5 is representation of intensity profiles, of torches, used for characterisation in an embodiment of the present invention;

Figure 6 is a representation of a an intensity profile varying mask; and

25 Figure 7 is a flow diagram showing a method of triggering an optically controlled interactive apparatus according to at least one embodiment of the present invention.

Referring now to Figures 1 and 2, an optically interactive apparatus (100), in this example for controlling audio outputs (102a-h) linked to exhibits (103a-h), comprising a video camera (104), a processor (106), a

30

graphical user interface (GUI) (107), a data store (108) and battery operated torches (110a,b).

5 Video camera (104) captures a reference image (111) of a scene (112) in the absence of illumination from the torches (110a,b). This reference image is passed to the data store (108), a memory, from where it can be called by the processor (106). A routine that generates the GUI (107) runs upon the processor (106) such that the GUI (107) is output to a screen (114).

10

The GUI (107) typically comprises a define target window (116), a target definition parameter window (118), an output file selection window (120), and an active view window (122). An operator of the apparatus (100) can select target areas (124a-h) using the define target window (116) in which
15 a pair of cross-hairs (126) are used to draw a box (128) about a proposed target area using a mouse (not shown). The target areas (124a-h) are confirmed either by clicking a mouse button or by a pre-defined keystroke on a keyboard (not shown). Alternatively, target areas (124a-h) can be selected by manually entering the position, location, width and height of
20 the proposed target area in the target definition parameter window (118) from a keyboard. Such a "point and click" target selection arrangement is far more efficient than requiring the relocation of physical sensors upon a display by a person as there is no need for the person to, for example, climb ladders in order to remove sensors from their existing positions and
25 place them in their new locations. Additionally, some valuable, delicate and oddly shapes and textured surfaces cannot have sensors put on them.

This arrangement also allows the remote selection of targets, for example, targets could be selected for displays throughout a museum by a single
30 curator in an office using this system, without the curator having to leave the office. The selection of target areas could be made from anywhere in

the world over the Internet, which could be useful for teachers to define targets and content in advance of a school visit to a museum or even online players in a game to define targets and messages for their real-world counterparts.

5

It will be appreciated that the observed scene may or may not be present upon the screen (114) during target selection. The screen may display a data file that may be projected on to a surface. It is also envisaged that people could also email on files and images for targets.

10

Selection of the target areas (124a-h) can be effected manually by an operator or automatically by the processor running pattern recognition software, or by a combination of the two. For example, gross target area selection is carried out automatically and is manually fine tuned.

15

Following selection of a target area (124b), an output file (130) is associated with the target area (124b). The output file (130) is either selected from a list (132) displayed within the output file selection window (120) of the GUI (107) or can be selected by manually entering a filename into a data entry box in the target definition parameter window (118) from a keyboard.

20

The video camera (104) periodically acquires an active image (134) of the scene that is displayed in the active view window (122), typically every 40ms.

25

The torches (110a,b), typically employing broad band emission, usually the visible spectrum and any safe or economically viable parts of the invisible spectrum, for example infra-red or ultraviolet, and broad beam width, usually varying from 1cm to 10 cm in width, sources, such as tungsten filament, or halogen, bulbs with reflectors and lenses are

30

14

switched on and their beams (136a,b) are moved across the scene. Each torch (110a,b) has a highly individual intensity profile with position within an illuminated area which enables it to be identified and distinguished from the beam of other torches (110b,a), and to be tracked
5 across the scene as will be described hereinafter. Sets of particular features within an intensity or chromatic profile of a torch are referred to as feature vectors, selection of one or more of these feature vectors allows the identification of a particular torch from it's beam and specific feature vectors can be used to track beams across a scene.

10

As the torch beams (136a,b) enter one of the target areas (124a-h) their presence is noted by the processor which typically applies one of two criteria to determine whether or not to trigger the output file (130) associated with that specific target area (124b). Different target areas can
15 have different output files associated with them. In the case of an output file with an audio component the audio component of the file may be output via open speakers, directional speakers, headphones (wired or wireless) or a hand held speaker device. In the case of an output file with a video component the video component of the file may be output via a
20 projector, a screen or a hand held device, such as for example a personal digital assistant, other possible forms out output that are commonly used in museums include smell and animatronic models. In deed, anything that responds to a control signal, for example - sliding doors, locks etc.

25 The shape and area, for example the length and ratio of the principal axes of the ellipsoid shape, of the torch beams (136a,b) yield information relating to the distance and orientation of the torch from the scene, surface. The criteria used to identify a flashlight is described hereinafter.

30 If a large enough target area is selected the motion of the torch beam (136a,b) can be tracked, it's past motion history stored and pattern

recognition used to identify characters, such as an alphabetic letter, a symbol or other predetermined shape. Only certain recognised characters may be used to trigger an output file.

- 5 One method of locating a torch beam within a scene is to subtract the reference image from the active image to leave a difference image. The positions of the torch beams within the scene will be evident from this difference image as compared to the reference image.
- 10 Trigger criteria are now described with reference to Figures 3 and 4. One method is to use a beam centroid location scheme for a torch beam (300). This involves an outer locus (302), or periphery, being determined for the beam (300), typically where the intensity of the beam (300) falls below a threshold value, or the contrast between adjacent regions of the beam is
15 above a threshold value, and a geometric centroid (306) of the beam (300) to be calculated by the processor (106). The location of this calculated geometric centroid (306) is then taken to be the location of the beam (300). Thus, when the processor (106) detects the centroid (306) entering the target area (124b) within the active image (134) it triggers the output
20 file (130) associated with the target area (124b).

- A second, and in many instances preferred method is to use a beam overlap location scheme for a torch beam (400). This involves the determination of an outer locus (402), or periphery, of the beam (400).
- 25 This typically involves determining where the intensity of the beam (400) falls below a threshold level, or where the contrast between adjacent regions of the observed beam area have a contrast greater than a threshold value. When the processor (106) detects the outer locus (402) crossing the boundary of the target area (124b) a routine is run that calculates how
30 much of the beam (400) overlaps the target area (124b). This routine is run upon the processor (106) as long as the beam (400) is detected within

the target area (124b). The output file (130) will only be triggered when a threshold amount, for example 50%, of the area contained within the outer locus (402) is detected within the target area (124b).

- 5 Alternatively, instead of, or in addition to evaluating how much of the beam area is within the target area, an evaluation may be made of how much of the target area is overlapped by beam area. The threshold level of the beam profile may be set such that it is necessary to have two or more beams at least partially overlapping in order to trigger certain responses. This encourages co-operation between and may be particularly
10 useful in, for example, an educational or gaming application for children that encourages social interaction between participants.

- Due to the sizeable finite area and shape of the torch beams (136a,b) each beam (136a,b) can sweep out an area and can trigger multiple target areas
15 (124a-h) simultaneously. This is not possible with a laser pointer due to the small cross-sectional area of the beam.

- It is possible to configure target areas to generate a trigger signal in response to only certain torches profiles, for example, not all targets are
20 necessarily live for every member of a group. It is also possible to link different output files to a target depending upon which torch illuminates the target, for example, a simple explanation of an exhibit can be output for a torch given to younger children, an intermediate explanation can be
25 output for a torch given to older children and a detailed explanation can be output for a torch given to adults.

- In one embodiment the torch beams (136a,b) are modulated, typically by the imposition of a signal to the supply voltage, such that the modulation
30 is not visible to the naked eye but can be captured by the video camera (104). Such a modulation signal can be used as an identifier to identify

the torch (110a,b) or alternatively, if switched on, for example by an action of a user such operating a switch, can be used in an analogous fashion to a 'mouse click' to allow selection of a target area and not allow selection of a target area when switched off. That is to say, a torch itself
5 can be used to select and/or define target areas in the observed scene.

It will be appreciated that multiple video cameras can be positioned around the scene in order to provide a number of viewing angles for the scene. Inputs from the video cameras are fed to the processor (106) and
10 the same target areas (124a-h) defined in reference views of the scene from each video camera. This reduces effect of obscuration of a target area by a user or third party as the target area resulting in failure to generate a trigger signal as the target area will remain visible from another video camera which can trigger the output file upon the torch
15 beam illuminating the target area.

In a preferred embodiment the processor (106) maintains a history, for example a counter (138) for each torch beam (136a,b), identified either by their intensity or chromatic profiles. Such an identification can be used
20 to distinguish trigger torches from other light sources such as reflections of the sun from a reflective surface.

The use of the intensity profiles of torch beams (136a,b) to identify torches (110a,b) is detailed with reference to Figures 5 and 6. A cross-
25 section of intensity profiles (502,504) of two torches (110a,b) show marked differences. These profile differences can be due to manufacturing tolerances in the production of parabolic reflector mirrors, lens pieces and bulbs that make up the light emitting portion of a torch. The profile differences enable the processor (106) to distinguish between
30 different torches and can be used as to identify specific torches even after torch beams have crossed and demerged. This is not readily achieved with

laser pointers as there is not sufficient structure in the beam profile to identify individual pointers easily.

Intensity profile differences can be enhanced by the use of a patterned mask (600) for placement over an output, such as a lens, of the torch. The mask (600) can be a simple cut-away mask to provide abrupt changes in intensity profile. Alternatively, the mask (600) be formed of regions of neutral density filter of varying thickness to provide either gradual alteration of the intensity profile or abrupt changes in the intensity profile.

The counter (138) is used to monitor each time a given target area (124a-b) is triggered. This allows the collection of user data for analysis purposes such as, for example, determining the optimum location of target areas within a scene, and user demographic preferences for areas searched for target areas. The use of the counter (138) also allows different output files to be output depending upon how many times a user's torch beam (136a,b) has triggered a given target area. This results in increased user interest in a display and provides the opportunity for layered information dissemination, for example, different chapters of a story to be displayed each time a given torch beam (136a,b) triggers a given target area (124b), or more details being given at successive visits to the same target by a user.

It is also envisaged that the video camera (104) and processor (106) can be used to track shadows cast by the torch beams (136a,b).

Referring now to Figure 1a, a second embodiment of an optically triggered interactive apparatus (150) comprises a video camera (152), output devices (156a-c), a control unit (159) and battery operated torches (158a,b). The camera (152) contains an integral processor (160), data

store (162) and a wireless transceiver (164). The output devices (156a-c) comprise, in this example, an audio output (166), a wireless transceiver (168) and data store (170). The control unit (159), typically a laptop computer or a PC, comprises a screen (172), a processor (174), a data
5 store (176) and a wireless transceiver (178).

In a set up configuration the control unit (159) is connected to the video camera (152) either via their respective wireless transceivers (178,164), typically IEEE802.11, Bluetooth or Firewire link, or via a hardwired link,
10 for example via a Universal Serial Bus (USB) cable. Target areas are defined on via a GUI displayed on the screen (172) of the control unit (159), as described hereinbefore with reference to the first embodiment of the invention.

15 Data corresponding to the target areas and their associated output files are transmitted via the connection between the camera (152) and the control unit (159) to the processor (160) and data store (162) of the camera (152).

The connection between the camera (152) and the control unit (159) can
20 now be broken and the camera (152) assumes control of the triggering operation for the output devices (156a-c) using the integral processor (160) and data store (162). The triggering of the output devices (156a-c) is typically effected using one of two criteria to determine whether or not to trigger the output file (130) associated with that specific target area
25 (124b). The trigger criteria have been described hereinbefore.

The camera (152) usually triggers an output device (156a-c) by sending a trigger signal to the output device via their respective wireless transceivers (164, 168) and an output data file associated with the trigger
30 signal sent is called from the output device's data store (166). Alternatively, an output data file can be recalled from the camera's data

store (162) and transmitted to the output device via their respective wireless transceivers (164,168).

It will be appreciated that variations described in relation to the first embodiment of the present invention, for example multiple camera positions and the use of a counter, are equally applicable to the second embodiment of the present invention.

Referring now to Figure 7, a method of optically triggering an interactive apparatus comprises capturing a reference image of a scene (Step 700), defining at least one target area within the reference image of the scene (Step 702), illuminating a portion of a scene with a torch (Step 704), capturing an active image of the scene (Step 706) determining whether the torch illuminates a least a part of a target area (Step 708) and outputting a trigger signal if the torch illuminates at east a part of the target area in a predetermined manner (Step 710).

Although described with reference to the output of audio data files it will be described that the present invention is equally applicable to the outputting of visual, video and audio-visual data files and also animatronics, smells etc as noted hereinbefore. Indeed it is envisaged that the present invention may be employed in, for example, audio tours of museums, castles, churches, stately home, caves, mines, dungeons, quarries or cellars, interactive posters (e.g. at tradeshow, exhibitions and conferences), interactive rides (e.g. in themeparks), interactive children's toys, interactive signposts and advertising thereupon, interaction in lecture theatres and auditoria, for example to allow voting and selection, interactive wall displays (e.g. in a classroom) and Do-It-Yourself (DIY) applications, for example identifying the location of pipes and/or wires behind plaster to prevent drilling into the pipes and/or wires.

A security system that monitors the progress of security guards and restricts access to designated areas based upon identifying torches used by security staff by their intensity or chromatic profiles is envisaged. Such a
5 system could also be used to identify intruders using torches by their use of a non-known intensity profile.

The use of video tracking of a torch, as described hereinbefore, has a number of advantages over the prior art arrangements including that
10 where a visible torch are used both the user and others nearby can see where the torch are pointing. The torch provides illumination for targets in low lighting environments, for example caves, or where strong light can cause degradation of an exhibit such as an ancient painting or tapestry. Such a system allows users to interact with exhibits at a
15 distance, for example when standing behind a protective barrier.

Additionally, such a system does not require target areas to be visible, i.e. the targets can be hidden, unlike some prior art systems, as they are regions defined in a computer program and allows monitoring of the
20 whole of a scene, surface, of interest. The monitoring of the whole of the surface is useful as it allows statistics to be acquired relating to the areas where a user expects to find a target area and allows a controller to alter the position of targets accordingly, should they wish to do so. The monitoring of the whole area of the surface allows a signal to be output in
25 response to how close a user's torch beam is to a target area, for example an audible sound may increase in volume as a beam moves closer to a target and may decrease in volume the further away from a target the beam moves.

30 It will be appreciated that although described in relation to torches (flashlights) the present invention can be applied to any video tracked

22

broad beam light source for example a car headlight or a searchlight on a face of a building.

5 It will further be appreciated that the scene and the target areas may form part of a video image that changes with time. The target areas may therefore not be static within the scene viewed by the video camera but may move within the scene.

CLAIMS

1. An optically triggered interactive apparatus, comprising scene capture means arranged to capture an image of a scene, target selection
5 means arranged to select a target area within a reference image of the scene, detection means arranged to detect the presence of light incident within the target area of an active video image captured by the scene capture means, the detection means is arranged to determine an outer extent of an illuminated area, illuminated by a light source, within the
10 scene, and the detection means being arranged to output a trigger signal to processing means when a given proportion of the target area forms part of the illuminated area and/or when a given proportion of the illuminated area lies within the target area.
- 15 2. Apparatus according to Claim 1 wherein the light source is any one, or more, of the following: broad band, directional, spatially extensive.
3. Apparatus according to either of Claims 1 or 2 wherein the scene
20 capture means is a video camera, a CCD device or the like.
4. Apparatus according to any preceding claim wherein the target selection means is a graphical user interface (GUI).
- 25 5. Apparatus according to any preceding claim wherein the detection means is arranged to compare the reference image with the active image in order to detect the presence of light incident with the target area.
6. Apparatus according to any preceding claim wherein the detection
30 means is arranged to track movement of at least one beam of light incident upon the scene.

7. Apparatus according to any preceding claim wherein the detection means is arranged to monitor either, or both, of an intensity profile or, and, a chromatic profile of a light source, incident upon the scene.

5

8. Apparatus according to any preceding claim wherein the detection means is arranged to track a given light source, incident upon the scene based upon whether, one, or both, of the intensity profile or, and, the chromatic profile of the light source incident upon the scene.

10

9. Apparatus according to any preceding claim wherein the light source is arranged to be modulated.

10. Apparatus according to any preceding claim wherein the light source is a torch.

15

11. Apparatus according to any preceding claim wherein the detection means is arranged to increment a counter each time a given light source passes over a given target area.

20

12. Apparatus according to Claim 11 wherein the detection means is arranged to output a trigger signal that is dependent upon the value of the counter.

25 13. Apparatus according to Claim 12 wherein the actuation means is arranged to output an audio, a visual or an audio-visual rich media file that is dependent upon the trigger signal output by the detection means.

14. Apparatus according to any preceding claim wherein the scene capture means include the detection means.

30

25

15. Apparatus according to any preceding claim wherein the trigger signal are transmitted wirelessly over a local area network (WLAN) to the actuation means.

5 16. Apparatus according to any preceding claim wherein the actuation means is arranged to output an audio, a visual or an audio-visual rich media file upon receiving the trigger signal.

10 17. Apparatus according to any preceding claim comprising a plurality of image capture means, each of which are arranged to capture an active image the scene from different angles.

15 18. Apparatus according to Claim 17 wherein the detection means are be arranged to receive inputs from each of image captured means

19. Apparatus according Claim 18 wherein the detection means is arranged to output a trigger signal to the actuation means if one or more target areas is illuminated in at least one of the active images.

20 20. Apparatus according to any preceding claim wherein the scene is a virtual scene and the reference image is a map of the virtual scene.

21. A method of optically triggering an interactive apparatus comprising the steps of:

- 25 i) defining at least one target area within a reference image of a scene;
- ii) illuminating a portion of the scene with a light source;
- iii) capturing an active image of the scene;
- iv) determining a boundary of an area of illumination of the light
- 30 source;

26

- v) determining whether a predetermined fraction of the area of illumination illuminates at least part of a target area; and
- vi) outputting a trigger signal if the light source illuminates at least a part of the target area on a predetermined manner.

5

- 22. The method of Claim 21 including selecting the target areas by means of a graphical user interface.
- 23. The method of either of Claims 21 or 22 including comparing the
10 reference image with the active image in order to determine if a target area is at least partly illuminated.
- 24. The method of any one of Claims 21 to 23 including identifying a
15 light source illuminating an area of the scene by means of either an intensity profile or a chromatic profile.
- 25. The method of any one of Claims 21 to 24 including tracking an area of illumination within the scene.
- 20 26. The method of any one of Claims 21 to 25 including tracking a plurality of light sources illuminating areas of the scene.
- 27. The method of any one of Claims 21 to 26 including incrementing a counter each time a trigger signal is generated by a given light source
25 illuminating at least part of a target area.
- 28. The method of Claim 27 including outputting a differing trigger signal dependent upon the value of the counter.

27

29. The method of any one of Claims 21 to 28 including outputting an audio, a visual or an audio-visual rich media file in response to a processor receiving the trigger signal.

5 30. The method of any one of Claims 21 to 29 including outputting the trigger signal via a wireless local area network (WLAN) to the processor.

31. The method of any one of Claims 21 to 30 including capturing a plurality of active images of the scene from a number of image capture
10 means spaced thereabout.

32. A user interface located at a user device for use in selecting a target area and a corresponding output file for an optically activated interactive apparatus comprising:

15 an input mechanism for selecting an area of an image displayed upon a screen of the device as a target area;

an input mechanism for selecting the output file corresponding to the selected target area and/or another aspect of the image, the target area and output file having a link generated therebetween; and

20 an output mechanism arranged to output the output file upon a trigger condition being fulfilled.

33. A user interface according to Claim 32 wherein the trigger condition is an image capture means capturing an image of the target area
25 being at least partially illuminated by a broad beam light source

34. A method of determining user demographic statistics comprising the steps of:

i) providing each user with an identifiable light source;

30 ii) recording demographic information about each user;

- iii) providing an optically triggered interactive apparatus according to any one of Claims 1 to 20;
- iv) recording each time a target area is triggered by a user; and
- v) identifying each user by correlating their identifiable light source with their demographic information.

35. The method according to Claim 34 including recording how long each target area is illuminated by a users light source.

- 10 36. The method according to either of Claims 34 or 35 including storing the demographic data and the recorded data for a period of days, weeks, or months.

15 37. A method of defining a target area, for use with an apparatus in accordance any one of Claims 1 to 20, within a scene comprising:

- i) displaying a reference image upon a screen;
- ii) selecting an area of a screen as a target area; and
- iii) confirming the selection of the target area.

- 20 38. The method of Claim 37 including using a user manipulated device such as a keyboard, mouse, trackball or touchscreen to select the target area from the screen.

25 39. A computer readable medium having stored therein instructions for causing a processing unit to execute any one of the methods of any one of Claims 20 to 38.

30 40. A computer readable medium encoding a programme of instructions which when run upon a processor cause the processor to act as the detection means of any one of Claims 1 to 20.

29

ABSTRACT

OPTICALLY TRIGGERED INTERACTIVE APPARATUS AND
METHOD OF TRIGGERING SAID APPARATUS

5

An optically triggered interactive apparatus (100), comprises a video camera (104) arranged to capture a reference video image of a scene (112). A graphical user interface (107) is used to select a target area (124b) within the reference video image. A processor (106) arranged to
10 detect the presence of light incident within the target area (124b) of an active video image captured by the video camera (104). The processor is arranged to determine an outer extent of an torch beam (136a,b) within the scene (112) and outputs a trigger signal to a further processor (102a-
h) when a given proportion of the target area forms part of the
15 illuminated area and/or when a given proportion of the illuminated area lies within the target area.

To be accompanied, when published, by Figure 1 of the drawings.

20

1/4

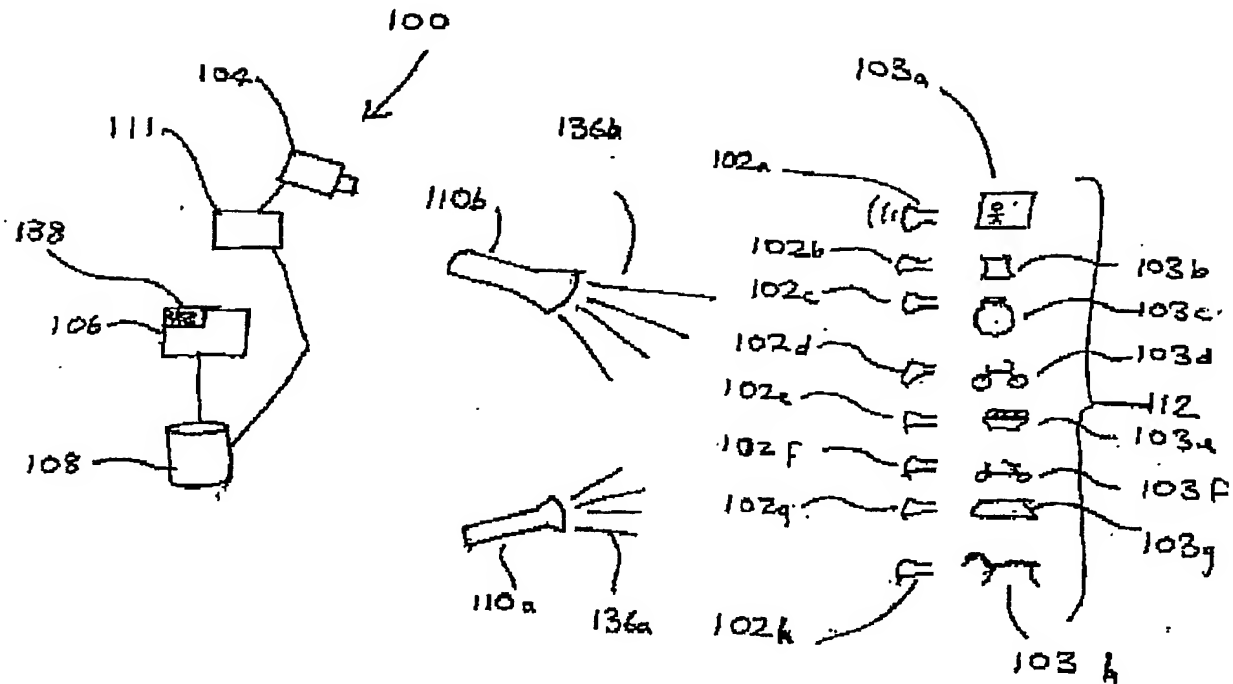


Figure 1

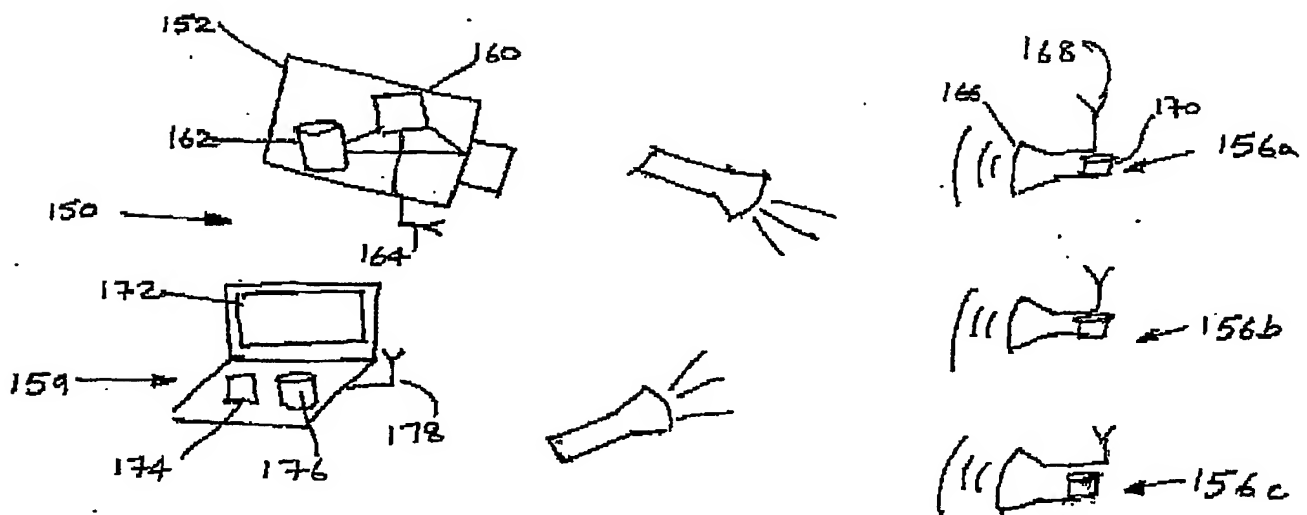


Figure 1a

2/4

120

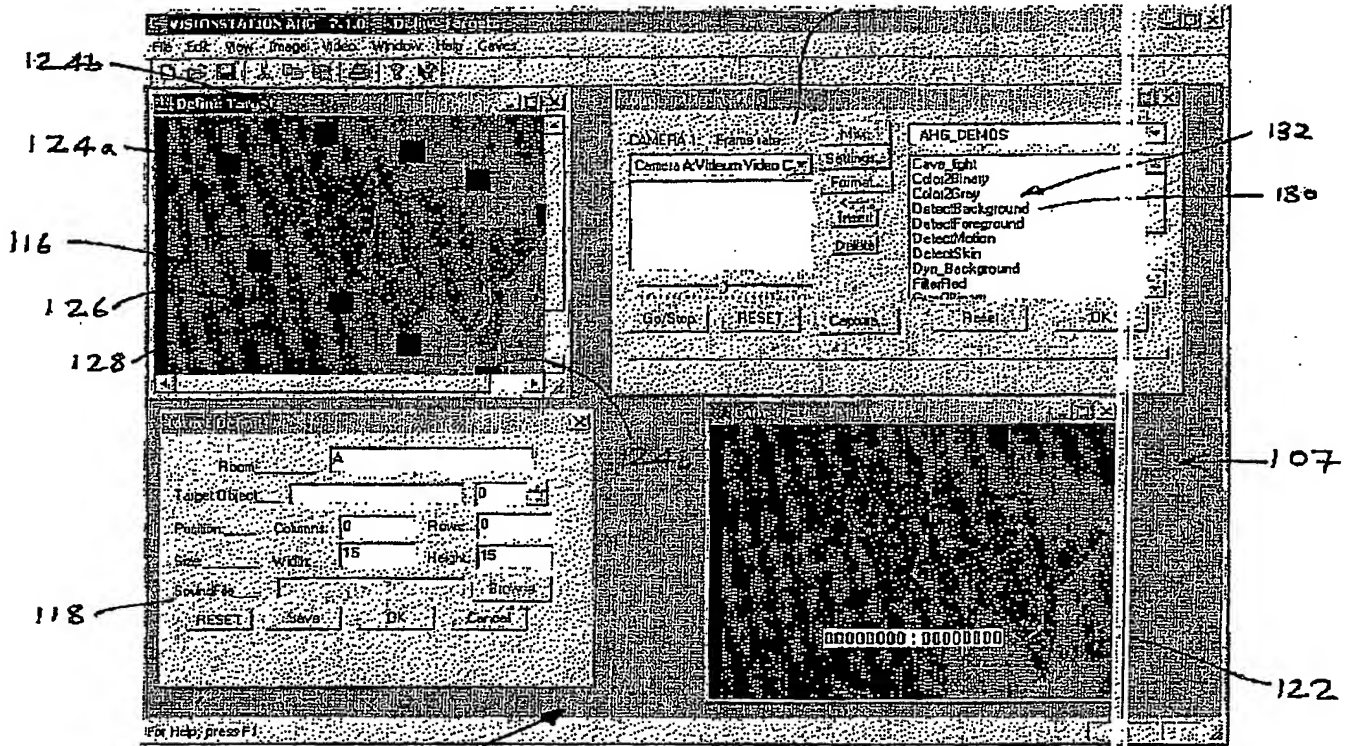


Figure 2.

300

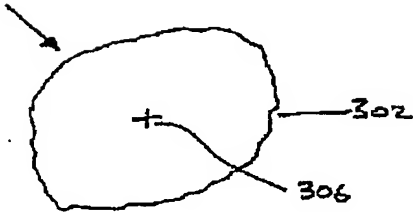


Figure 3

400


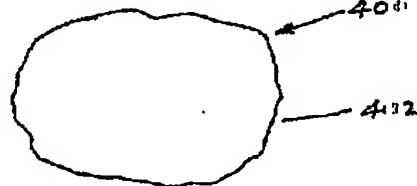


Figure 4

2/4

12.0

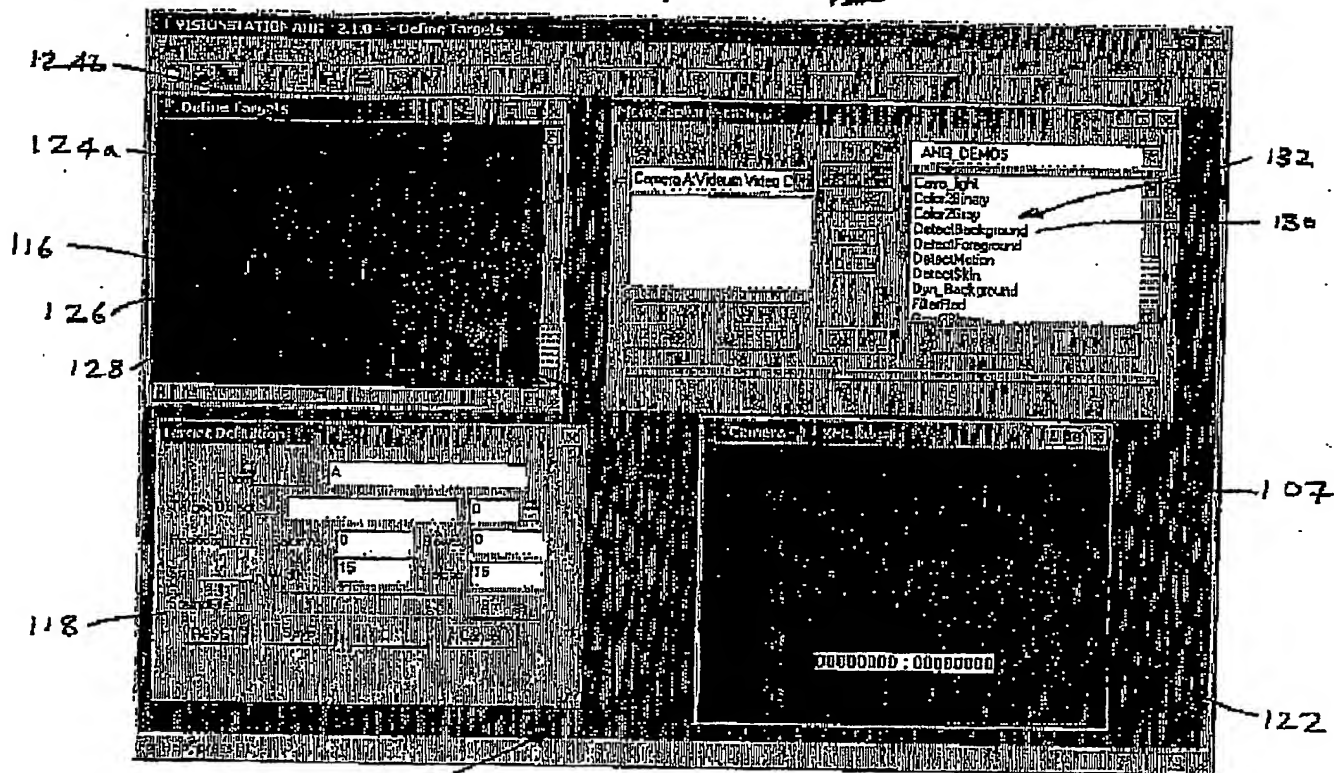

114

Figure 2.

300

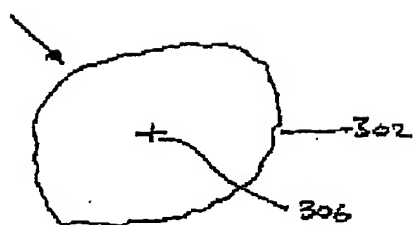


Figure 3

400



Figure 4

3/4

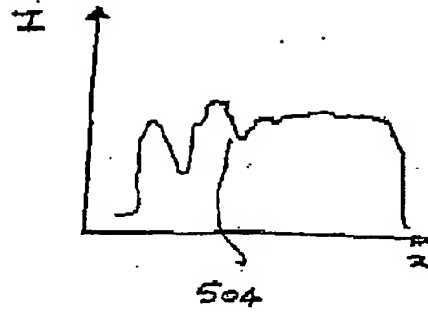
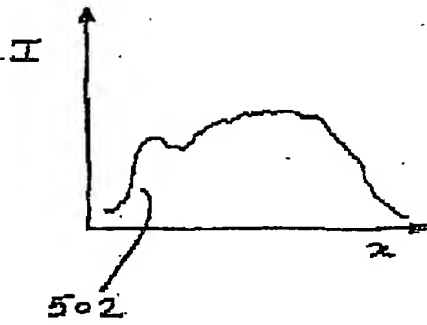


Figure 5

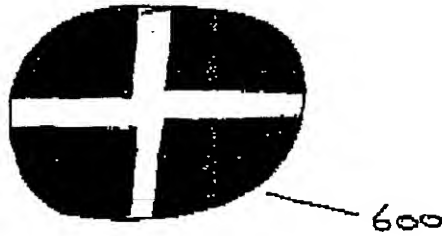


Figure 6

4/4

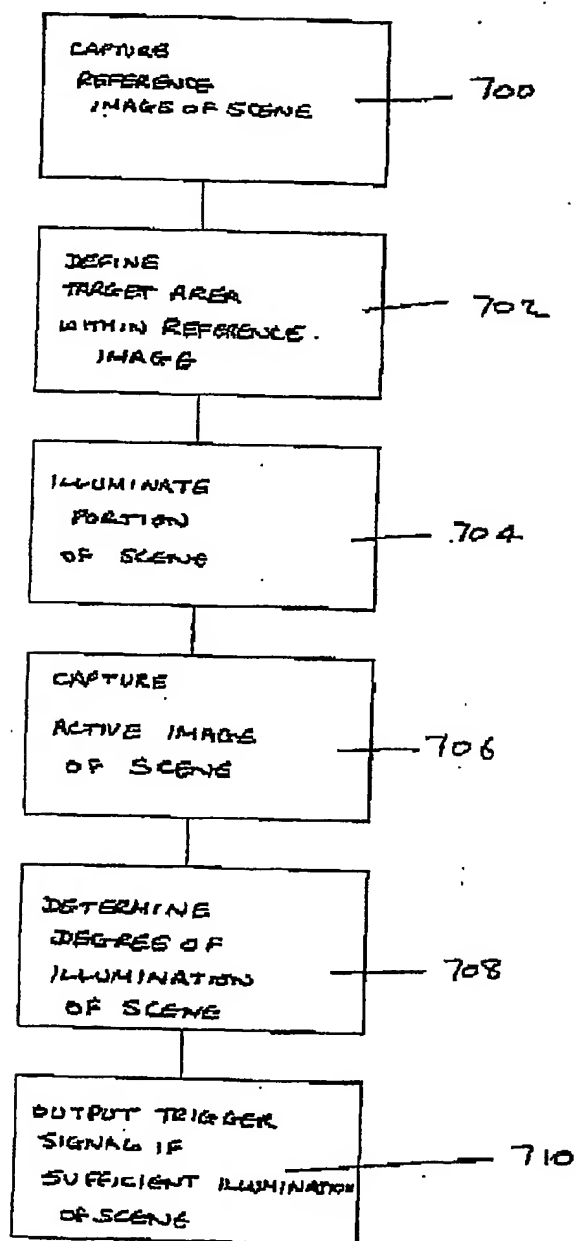


FIGURE 7.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.